
















# INSTRUCTION MANUAL

# Package List

- Without further ado, we kindly suggest you to list all parts needed for the chair first.


<p>(1)*1 <b>Backrest</b></p> 	<p>(2)*1 <b>Seat Cushion</b></p> 	<p>(3)*2 <b>Armrests</b></p> 
<p>(4)*1 <b>Mechanism</b></p> 	<p>(5)*1 <b>Gas Lift</b></p> 	<p>(6)*1 <b>Base</b></p> 
<p>(7)*5 <b>Legs</b></p> 	<p>(8)*5 <b>Casters</b></p> 	<p>(9)*10 <b>Bolts</b></p> 
<p>(10)*4 <b>Bolts</b></p> 	<p>(11)*4 <b>Bolts</b></p> 	<p>(12)*6 <b>Bolts</b></p> 
<p>(13)*1 <b>Wrench</b></p> 		

# Assembly Instruction


## • Step 1:

Turn the Base **(6)** upside down, then insert Base Legs **(7)** one by one to Base.

Use the Wrench **(14)** to screw Ten Bolts **(10)** into the pre-drilled screw holes to fix the Base and the Base Legs.

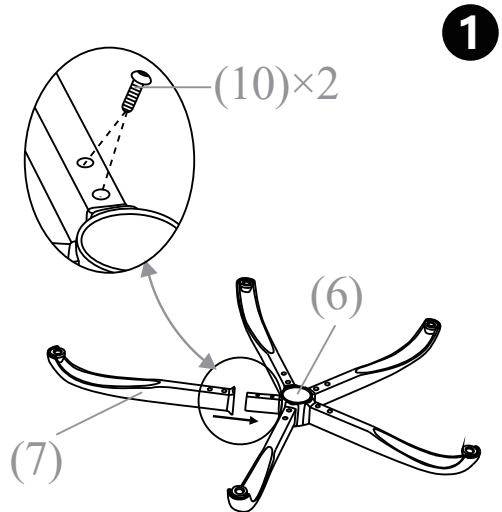

**2**

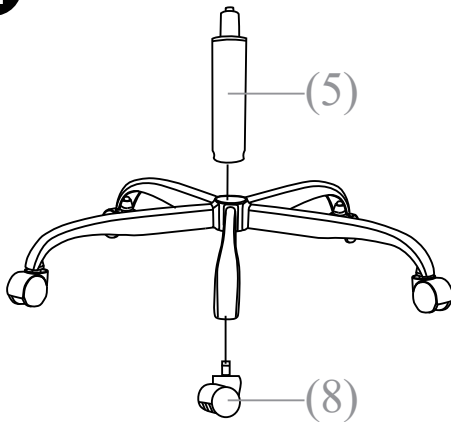


## • Step 2:

Press the Casters **(8)** into the holes at the end of each Base Leg.

Insert the Gas Lift **(5)** into the center hole of the Base.

### • Step 3:

Turn the Seat Cushion **(2)** upside down and align the hole position of the Armrest **(3)\*1(L)\*1(R)** with the pre-drilled hole position under the Seat Cushion. Attach the Armrest **(3)\*1(L)\*1(R)** to the Seat Cushion **(2)** with Six Bolts **(13)**, using the Wrench **(14)**. All bolts do not need to be tightened, they only need to be fixed in half.

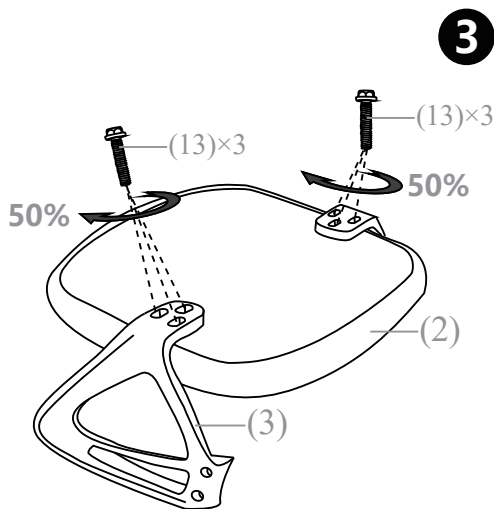


Note 1: The "Front" mark on the Armrests and the "Front" mark on the Seat Cushion should be in the same direction.

Note 2: Armrests are labeled with an "L" (left) or "R" (right) to show which side they should be placed on.

4


### • Step 4:

Attach the Backrest **(1)** to the Armrest **(3)\*1(L)\*1(R)**, Use the Wrench **(14)** to screw Four Bolts **(12)** on the left and right sides of the armrest to fix the back. All bolts do not need to be tightened, they only need to be fixed in a half.

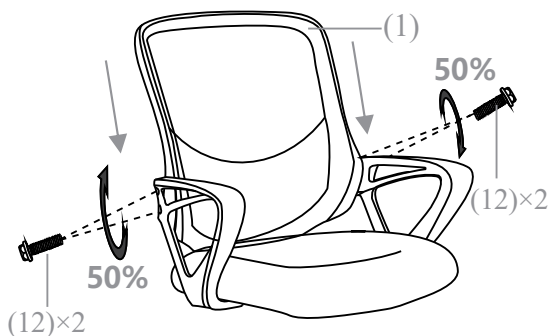


• **Step 5:**

100% tighten the Bolts **(13)** \* 6  
to fix the armrest.

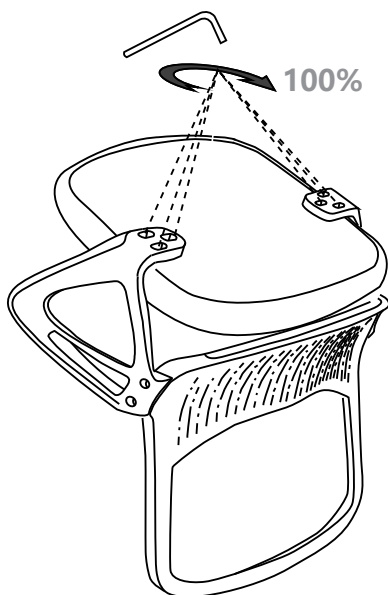

**5**

**6**

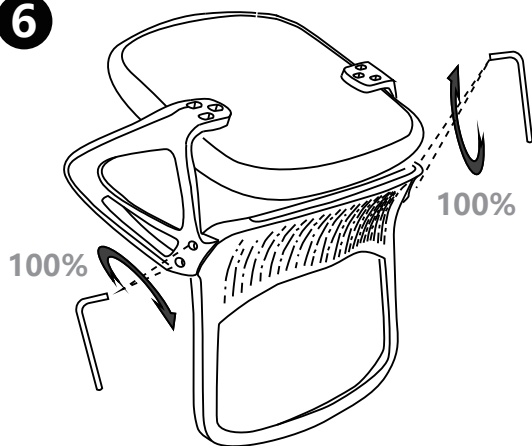


• **Step 6:**

100% tightened the Bolt **(12)**\* 4 to fix the armrest and chair back.


## • Step 7:

Attach the Mechanism (4) to the Seat Cushion using Two Bolts (11) at the front and Two Bolts (11) at the back, tighten all the bolts with the Wrench (14).

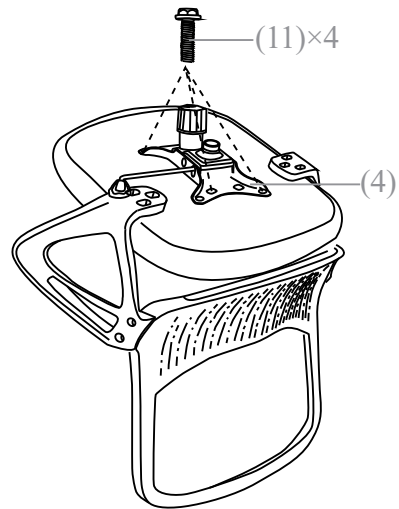

7

8

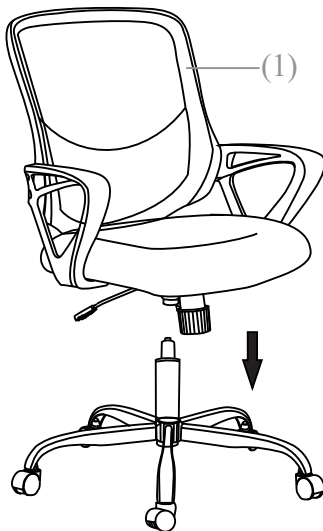

## • Step 8:

Insert the slot on the back of the mechanism behind the cushion into the Gas Lift.

### CAUTION:

Make sure all bolts and screws are fully tightened before using chair. Lubricate all moving parts and tighten all bolts/screws every 6 month or whenever needed.

# Instructions For Use

## 1. Seat Height: Paddle-shaped lever on the right side



To raise:

While taking your weight off chair, lift lever up.




To lower:

While seated, lift lever up.

\* At the proper height, your feet should rest flat on the floor.

## 2. Operating the rocking function

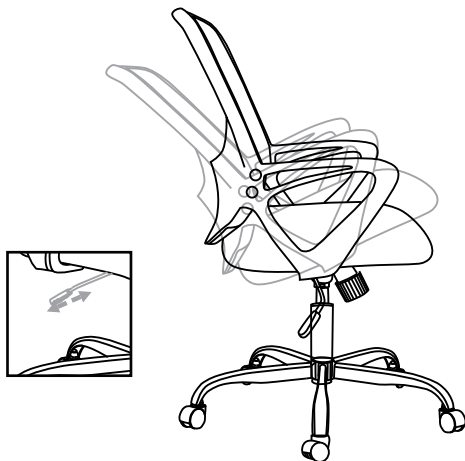

To let your chair tilt back, pull the control handle out.

To stop your chair from tilting, sit forward, then push the control handle in.

# Safety And Maintenance

- Do not stand on the chair, Do Not use the chair as a stepladder.
- Use this product for seating one person at a time.
- Do not use the chair unless all bolts and screws are firmly secured.
- Avoid contact with sharp objects to prevent puncturing the fabric.
- Every 6 months, check all bolts and screws to ensure they are tight.
- To clean, spot clean only using a damp towel and mild cleaner, first test on a small, unseen area of fabric.
- Chair weight limit not to exceed 250 lbs.

## Safety Information



Sit in the center of the chair, with your back to the backrest



Do not sit at the front edge of the chair



Do not stand on the chair



Do not use the chair with more than one person



Do not push the chair around when a person is sitting in it



Do not push down on the backrest when a person is reclined



Do not place all your weight on only the backrest