

## amazon commercial



LED Value UFO Highbay Luminaire à Valeur OVNI à LED pour Plafonds Élevés Lámpara LED Económica Tipo Ovni para Techos Altos B081415T9W, B0813ZSVKJ, B0813ZFSYQ, B0813ZHRM2


English 4	
Français10	
Español	

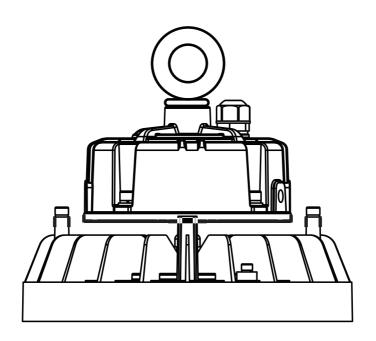

















**C** (x 1)



## **IMPORTANT SAFEGUARDS**



Read these instructions carefully and retain them for future use. If this product is passed to a third party, then these instructions must be included.

When using electrical appliances, basic safety precautions should always be followed to reduce the risk of fire, electric shock, and/or injury to persons including the following:

**A** CAUTION Risk of electric shock! To prevent risk of electric shock, turn off the power at the main circuit breaker box before installation.

▲ WARNING Risk of fire! Most dwellings built before 1985 have supply wiring rated up to 140 °F (60 °C). Consult a qualified electrician before installation.

▲ CAUTION Risk of fire! Do not install the product on a radiant-heating ceiling.

▲ CAUTION Risk of electric shock! This product must be installed in accordance with the applicable installation codes by a person familiar with the construction and operation of the product and the hazards involved. Consult a qualified electrician to ensure correct branch circuit conductor.

⚠ CAUTION Risk of eye damage! LEDs emit bright light. Avoid looking directly into the light source for prolonged periods.

- This product is rated 120-277 VAC and must be connected to a suitable power source.
- This product is not intended for recessed installation in ceilings, or soffits.
- Do not install any lighting assembly closer than 6" (15 cm) from any curtain or similar combustible material.
- The product employs non-replaceable LED light sources.
- Contact the municipal building department to learn about applicable local codes, permits and/or inspections.
- This product is intended for use in accordance with the National Electrical Code, ANSI/NFPA 70, and the Canadian Electrical Code, Part I, in non-hazardous locations, and the Mexican Electrical Code [Instalaciones Eléctricas (utilización), NOM-001-SEDE].
- Use this product only with the provided hook. Replacement hook should be able to withstand 5 times the weight of the product.

## SAVE THESE INSTRUCTIONS

#### Intended Use

- This product is intended for commercial and residential use.
- This product is rated IP65 and it is suitable for indoor and outdoor use.
- This product is not intended for use with emergency exits.
- This product can be used with 0 10 V dimmer (sold separately).
- No liability will be accepted for damages resulting from improper use or non-compliance with these instructions.

#### **Before First Use**

- Check the product for transport damages.
- Remove all the packing materials.

⚠ DANGER Risk of suffocation! Keep any packaging materials away from children – these materials are a potential source of danger, e.g. suffocation.


#### **Installation Instructions**

⚠ DANGER Risk of falling object! The mounting surface should be able to withstand 5 times the weight of the product.

⚠ DANGER Risk of electric shock! Disconnect power before installation.

▲ WARNING Take special precautions when working on heights, for example, while using a ladder. Use the right type of ladder and ensure it is structurally sound. Use the ladder in accordance with the manufacturer's instructions.

**NOTICE** This product should be mounted in a horizontal position only with the light source pointing down.

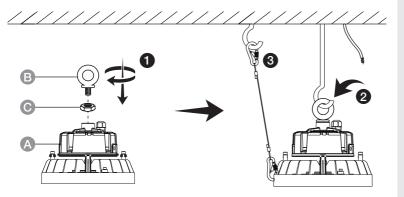








- 1. Screw the hook (B) and the nut (C) tightly.
- 2. Fix the product onto a heavy-duty anchor hook or other suitable fixing point.
- 3. As added protection, secure the product to an additional mounting point using a safety line (not provided). The safety line should be able to withstand 5 times the weight of the product.

#### Wiring


▲ WARNING Risk of electric shock! To prevent risk of electric shock, turn off the power at the main circuit breaker box before installation.


A WARNING Risk of electric shock! This product must be connected to a properly grounded electrical system. Never wire the product to a two-wire system that is



not grounded. Contact a qualified electrician for information with regards to proper grounding methods as required by the local electrical code in your area.

**NOTICE** There is an optional 0 – 10 V dimming circuit/dimmer for this product (sold separately).

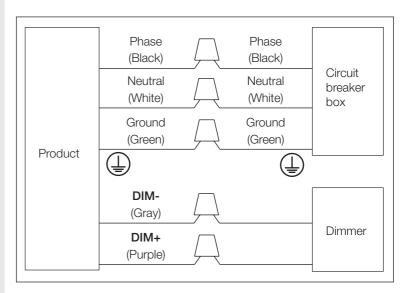

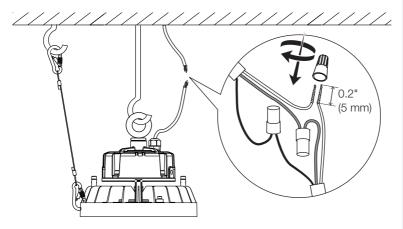

Use twist-on wire connectors to join the wires.

## Cleaning

**A WARNING** Risk of electric shock! To prevent electric shock, turn off the power at the main circuit breaker box before cleaning.

- To clean the product, wipe with a soft, slightly moist cloth.
- Never use corrosive detergents, wire brushes, abrasive scourers, metal or sharp utensils to clean the product.

## FCC - Supplier's Declaration of Conformity

Unique Identifier	B081415T9W - LED Value UFO Highbay, 50 Watt, 25000 Hours, Dimmable 0-10V, 6500 Lumens, ETL and DLC Certified, Daylight, 1-Pack B0813ZSVKJ - LED Value UFO Highbay, 130 Watt, 25000 Hours, Dimmable 0-10V, 18000 Lumens, ETL and DLC Certified, Daylight, 1-Pack B0813ZFSYQ - LED Value UFO Highbay, 175 Watt, 25000 Hours, Dimmable 0-10V, 24000 Lumens, ETL and DLC Certified, Daylight, 1-Pack B0813ZHRM2 - LED Value UFO Highbay,
	220 Watt, 25000 Hours, Dimmable 0-10V, 30000 Lumens, ETL and DLC Certified, Daylight, 1-Pack
Responsible Party	Amazon.com Services, Inc





U.S. Contact Information	410 Terry Ave N. Seattle, WA 98109, United States
Telephone Number	(206) 266-1000

#### **FCC Compliance Statement**

- 1. This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:
  - (1) this device may not cause harmful interference, and
  - (2) this device must accept any interference received, including interference that may cause undesired operation.
- Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

#### **FCC Interference Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

#### Canada IC Notice

This Class B digital apparatus complies with Canadian CAN ICES-005(B) / NMB-005(B) standard.

## **Specifications**

Rated voltage:	120-277 V~, 50/60 Hz
Color rendering index (CRI):	80
Power factor:	0.9
Color temperature:	5000 K
Lifetime:	50,000 hours

Model number:	FG-03727	FG-03728
Rated wattage:	50 W	130 W
Luminous flux:	6,500 lm	18,000 lm
Net weight:	approx. 4.19 lbs (1.9 kg)	approx. 6.61 lbs (3
Dimensions	8.26 x 7.4"	8.26 x 8.07"
(H x D):	(21 x 18.8 cm)	(21 x 20.5 cm)

Model number:	FG-03729	FG-03730
Rated wattage:	175 W	220 W
Luminous flux:	24.000 lm	30.000 lm

Net weight: approx. 8.81 lbs (4 kg) approx. 11.9 lbs (5.4 kg)

Dimensions 9.84 x 8.46" 12.2 x 8.89"

Dimensions  $9.84 \times 8.46$ "  $12.2 \times 8.89$ "  $(H \times D)$ :  $(25 \times 21.5 \text{ cm})$   $(31 \times 22.6 \text{ cm})$ 

## Feedback and Help

Love it? Hate it? Let us know with a customer review.

AmazonCommercial is committed to delivering customer-driven products that live up to your high standards. We encourage you to write a review sharing your experiences with the product.







kg)



# amazon commercial

amazon.com/AmazonCommercial